

Trash  
Water

High Discharge Flow

Intensive Work

## SWT 150 EXL12 V2

Pumps Range

Self-Priming


ENGINE  
4ST | Gasoline

DISCHARGE FLOW  
132 m<sup>3</sup>/h

PRESSURE  
3.2 bar

SOLID SIZE Ø  
31 mm

NET WEIGHT  
97.5 kg

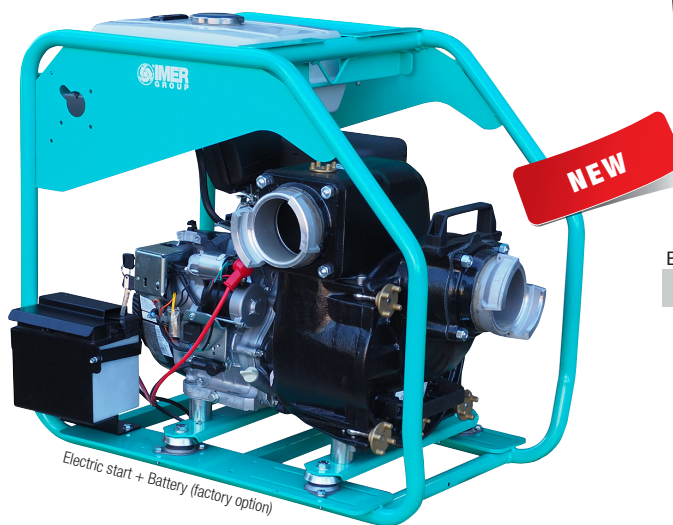

**3 YEARS**  
WARRANTY

EASY QUICK CLEAN  
out port

powered by



Built around durability, our SWT gasoline trash pumps feature a silicon carbide seal and a unique conical cast iron impeller design and a quickclean out port for easy maintenance and long service life. They reduce wear from abrasive materials and can handle solid objects up to 31 mm in diameter. There's even a strainer to ensure nothing bigger gets through.

### Standard equipment

- ✓ Four-stroke OHC engine
- ✓ Recoil start
- ✓ Electronic oil sensor security
- ✓ Silicon carbide mechanical seal
- ✓ Steel strainer, hose coupling and clamp

### Optional equipment

- + Wheelbarrow kit : ZCADGMP01-IM
- + Electric start + Battery (factory option)

### SWT 150 EXL12 V2

Pump type		Self-Priming
Suction Ø coupling	mm	100 (4")
Delivery Ø coupling	mm	100 (4")
Discharge flow	L/min	2200
Discharge flow	m <sup>3</sup> /h	132
Pressure	bar	3.2
Total dynamic head	m	32
Discharge head	m	8
Solid size Ø (Ø of strainer holes)	mm	31
Mechanical seal		Silicon carbide
Engine model		WORMS EX40
Engine type		OHC, 4-stroke gasoline
Fuel type		Unleaded gasoline 95
Fuel tank capacity	L	12.5
Autonomy	h	2 h 50
Dimensions L x l x H	mm	840 x 530 x 760
Packaging dimensions L x W x H	mm	1200 x 630 x 825
Net Weight	kg	97.5
Gross weight	kg	102

#### WORMS Entreprises

ZAC de Lamirault  
39 rue de Lamirault  
77090 Collégien  
FRANCE  
TEL. +33 (0) 1 64 76 29 50  
FAX +33 (0) 1 64 76 29 99  
www.wormsentreprises.com